




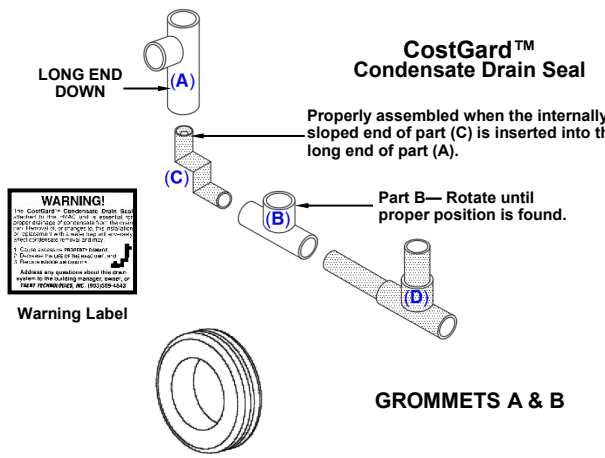






PARTS LIST

CostGard™ Condensate Drain Seal – MODEL YP-037-150-17  
YORK PREDATOR /SUN PRO — 3 TO 12-1/2 TON


NO TRAP  
REQUIRED

IDENTIFICATION SYMBOL		PART NO.	QTY.	PART NAME AND/OR SIZE
Bag 1		<div>CostGard™ Condensate Drain Seal Model: 1525-17-56 - Parts A, B, C &amp; D Installation Instructions and <b>Warning Label</b></div> <div><b>Important:</b> After installation of the CostGard™ Condensate Drain Seal is complete, the enclosed Yellow Warning Label must be attached to the HVAC unit.</div>		
		1	1	
Bag 2 or Box		<div>GROMMETS A &amp; B</div> <div>SCHEDULE 40 UV STABILIZED PVC PIPE</div>		
		2	2	GROMMET – FOR 3/4 INCH PIPE - PN. 2277
Bag 3		<div>SCHEDULE 40 UV STABILIZED PVC MALE ADAPTER (MIPT X SLIP)</div>		
		3	1	3/4 INCH PIPE—3-1/2 INCHES LONG
Bag 3		<div>SCHEDULE 40 UV STABILIZED PVC 90° ELBOW (SLIP X SLIP)</div>		
		4	1	3/4 INCH PIPE—6 INCHES LONG
Bag 3		<div>SCHEDULE 40 UV STABILIZED PVC MALE ADAPTER (MIPT X SLIP)</div>		
		5	1	3/4 INCH PIPE—8-1/2 INCHES LONG
Bag 3		<div>SCHEDULE 40 UV STABILIZED PVC MALE ADAPTER (MIPT X SLIP)</div>		
		6	1	3/4 INCH PIPE—16-1/4 INCHES LONG
Bag 3		<div>SCHEDULE 40 UV STABILIZED PVC MALE ADAPTER (MIPT X SLIP)</div>		
		7	1	3/4 INCH PIPE—18 INCHES LONG
Bag 3		<div>SCHEDULE 40 UV STABILIZED PVC MALE ADAPTER (MIPT X SLIP)</div>		
		8	1	3/4 INCH PIPE—23-3/4 INCHES LONG
Bag 4		<div>BRACKET</div> <div>CLAMP</div> <div>PIPE SUPPORT (requires screws listed below)</div>		
		11	3	SHORT #108 SUPPORT BRACKET 3/4 INCH CLAMP
Bag 4		<div>SELF TAPPING SCREWS</div>		
		12	10	#10-16 X 3/4" SELF TAPPING SCREWS
Screws—Bag 5 in Bag 4				

INSTALLATION ILLUSTRATION

**YORK PREDATOR SUN PRO**  
**MODELS 3 TO 12-1/2 TON**  
**ZH/ZJ/ZR/ZT 037, 049, 061**  
**ZH/ZJ/ZR 078-150**  
**DF 078-120**  
**BP/DH/DM/ZF/ZR/XP 078-150**  
**DR 090, 120, 150**  
**DJ 150**

**NOTE:**  
The condensate drain pan has been positioned so that the condensate drain is at the REAR.  
  
See manufacturer's instructions if pan rotation is necessary.

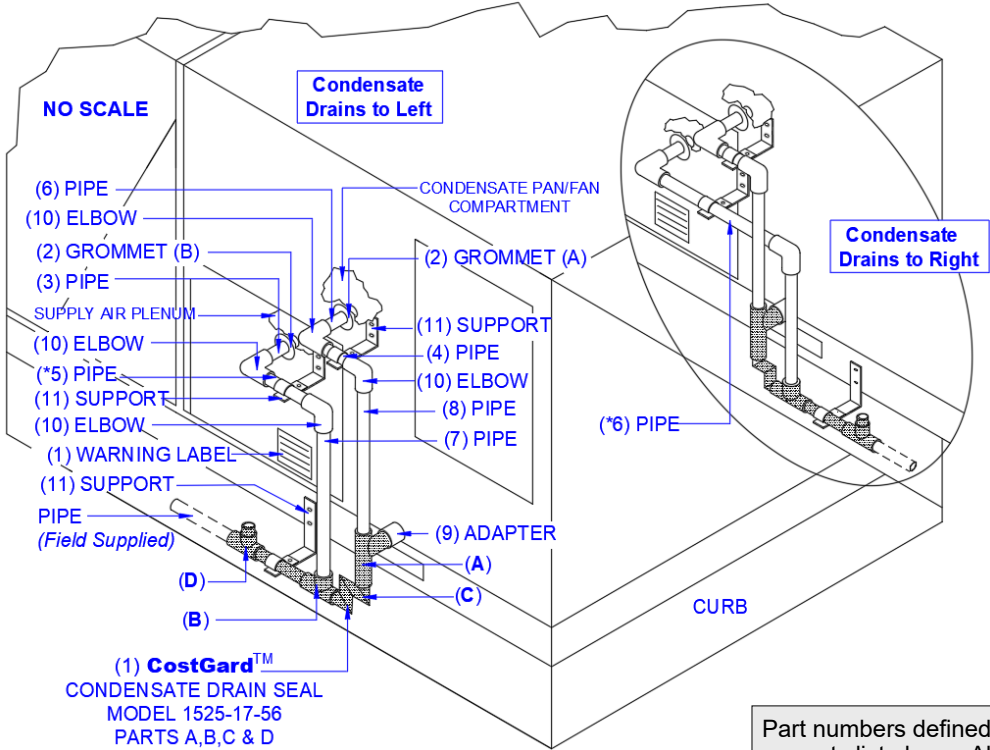

Part numbers defined on parts list above. All pipes are numbered.

# INSTRUCTIONS


CostGard™ Condensate Drain Seal – MODEL YP-037-150-17  
YORK PREDATOR/SUN PRO - 3 TO 12-1/2 TON

NO TRAP  
REQUIRED

This kit contains all the components necessary for installing the CostGard™ Condensate Drain Seal on the York Predator/Sun Pro Models 037-150. The components provided are listed on the backside of this page.

## INSTALLATION

- Step 1:** Open packages to check for missing or damaged parts. In case of discrepancies notify Trent Technologies, immediately.
- Step 2:** Check condensate drain pan connection location. Predator and Sun Pro models allow for the drain pan to be positioned for condensate to drain from the front or the rear. This installation requires the connection be positioned in the **REAR**. Rotate the pan if necessary.
- Step 3:** Identify the hole locations in the panels where installation pipes are to be connected, see Points A and B in the photographs to the right. If the HVAC unit is “CostGard™ Ready,” the proper hole sizes are precut and protected with a removable cover. In this case, remove the covers and proceed to Step 5. Otherwise continue to Step 4.
- Step 4:** For units not “CostGard™ Ready,” use a 1-3/8” hole saw and cut holes in the panels at the locations defined by the dimensions on the drawing to the right at points **A** and **B**.
- Step 5:** Install grommets provided, in holes.

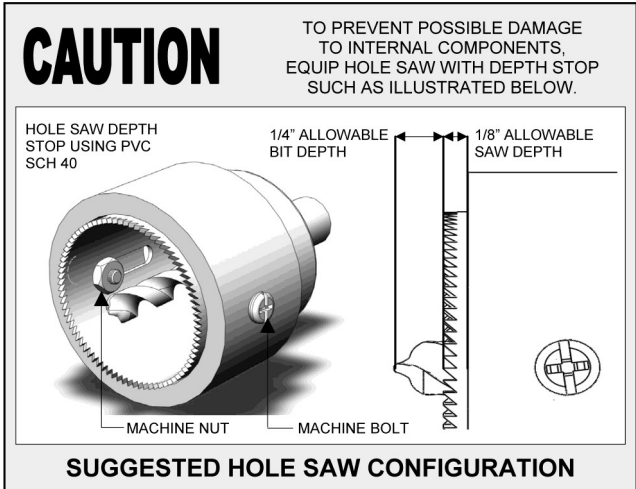

- Step 6:** Assemble the other components as illustrated on the back of this page, and dry fit all parts together. Note that Parts "A", "B" and "C" of the CostGard™ Condensate Drain Seal (See Parts List) are not bonded. This is to allow rotation for routing, draining condensate to either the left or right, and attaching the air supply piping. Apply PVC cement only after the proper rotation position is found. The photograph above and to the right shows the condensate draining to the left. For drainage to the right, rotate part “C” of the CostGard™ Condensate Drain Seal (See Parts List) to the right and use pipe “9” instead of pipe “8”, as shown in the illustration on the back of this page. **Once the components are assembled and pipe supports are attached, each connecting joint must be bonded with PVC cement.**

Contact Trent Technologies with questions regarding this installation.



## Step 7: SYSTEM CHECK OUT

### CHECKOUT PROCEDURE

With the system operating, make the following measurements:

- (1) Static pressure in the drain pan compartment, Point A.
- (2) Static pressure in the supply air plenum, Point B.

If these pressure values fall within "checkout range-air filter clean," defined on the chart to the right, the system will operate properly. And, it will operate properly when the filter is dirty and ready to be changed (.50 inch wc pressure loss). If the measured pressures are not within the defined operating range, it may still be possible to use the CostGard™ Condensate Drain Seal Model 1525-17-56. Contact Trent Technologies for resolution.

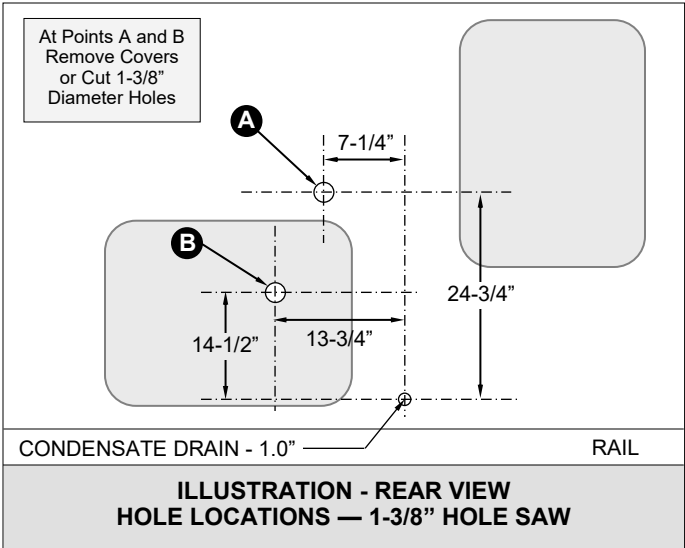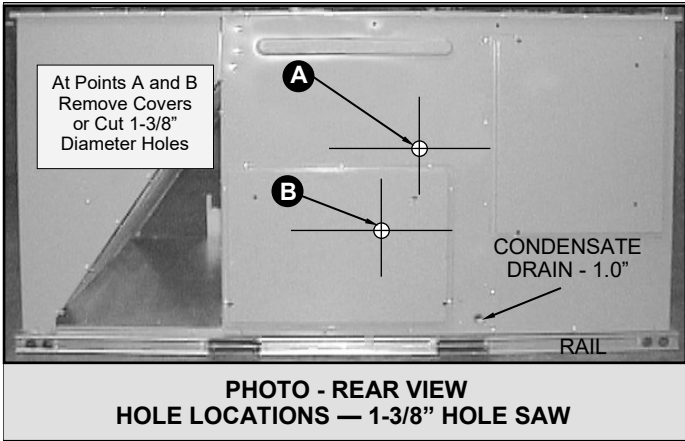

CostGard™ CONDENSATE DRAIN SEAL MODEL 1525-17-56  
OPERATING RANGE

